

Polygel DV

Rheology modifier

Chemical and physical characteristics (*)

Chemical Name Carboxyvinyl polymer Appearance Fine white powder INCI NAME Carbomer No. CAS 9003-01-4 PH (0.5% water dispersion) 2.7-3.5 Average equivalent weight

Viscosity (mPa·s) of neutralized dispersions (Brookfield RV, 20 rpm, 25°C)

% Dispersion	Viscosity		Spindle
	Min.	Max	
0.5	65,000	85,000	7
1	80,000	100,000	7

(*)Typical values not qualified for quality control purpose

Applications

POLYGEL DV is a synthetic polymer, benzene free, that can find large application in the cosmetic industry as thickener and suspending agent thanks to its efficiency and versatility.

POLYGEL DV dispersions are characterized by very high viscosity and good clarity (see Fig. 1). Therefore, it is very suitable for formulating sparkling and clear gels as well as for stabilizing emulsions both for cosmetic applications. Normal percentage of use is between 0.1 and 1.5% depending on type of formulation and final desired viscosity.

Use

When POLYGEL DV is dispersed into water and neutralized with an appropriate base, a clear gel is formed. Dispersion should be made by slow addition of the polymer in order to avoid the formation of lumps and stirring until all particles are completely hydrated. Turbulent agitation should be avoided to prevent trapping of air which would be difficult to remove from the finished product.

During the preparation of emulsions, POLYGEL DV can be dispersed also in the oil phase obtaining free flowing dispersions with concentration up to 30%.

The neutralization can be carried out with inorganic bases (such as NaOH, KOH, NH₄OH) or with organic amines (such as TEA, AMP, AMPD). To neutralize 1 g of POLYGEL DV to pH 7, ca. 0.01 equivalent of base are required (e.g. 0.4 g of NaOH, 0.9 g of AMP, 1.5 g of TEA). It is advisable to add strong bases previously diluted into water at a concentration not higher than 10%.

3V Sigma USA, Inc. - 888 Woodstock St. Georgetown, SC 29440 - Tel. 866.599.7896 - www.3VSigmaUSA.com


The information contained in this data sheet is based on our present and best knowledge. However, we make no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular use or purpose. Consequently, the product must be tested by the user according to his needs and his production and application conditions and purposes. Neither do we assume any responsibility for infringement of third parties patent rights which may arise from the use of the product. For industrial use only.



Technical Data Sheet


Inorganic bivalent bases must be avoided because an ionic cross-link can occur causing precipitation of the polymer.

Figure 1 - Viscosity vs. polymer concentration



Water dispersion neutralized to pH 7 with NaOH

Figure 2 - Viscosity vs. pH of polymer dispersion

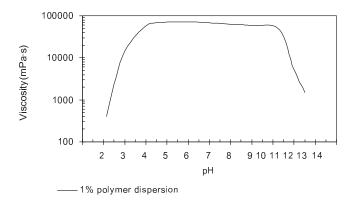

Prolonged high shear during and after neutralization is not advisable since this could possibly lead to a permanent loss of viscosity.

The addition of electrolytes can cause a drop of viscosity; this is particularly evident with salts of bi- and trivalent cations. In normal conditions, gels prepared with POLYGEL DV neither prevent nor promote the growth of micro-organisms; therefore, the addition of a suitable preservative system is advisable.

UV rays can cause loss of viscosity in POLYGEL DV gels. The addition of water-soluble UV-absorbers, such as UVASORB S5 (Benzophenone-4), can help for preventing polymer degradation.

3V Sigma USA, Inc. - 888 Woodstock St. Georgetown, SC 29440 - Tel. 866.599.7896 - www.3VSigmaUSA.com

The information contained in this data sheet is based on our present and best knowledge. However, we make no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular use or purpose. Consequently, the product must be tested by the user according to his needs and his production and application conditions and purposes. Neither do we assume any responsibility for infringement of third parties patent rights which may arise from the use of the product. For industrial use only.



Technical Data Sheet

Toxicological information

 $\begin{array}{lll} \text{LD}_{50} \, (\text{oral}) & > 2000 \, \text{mg/kg} \\ \text{Acute skin irritation} & \text{non irritant} \\ \text{Acute eye irritation} & \text{non irritant} \\ \text{Skin sensitization (max. test)} & \text{non-sensitizing} \\ \text{Ames Test in S. thyphymurium and E. coli} & \text{non mutagenic} \\ \end{array}$

Transport, storage and handling

Labelling: product not classified as hazardous according to international transport regulations.

Store in the original closed containers in a dry cool place. Protect from moisture. Do not breathe dust and avoid contact with skin, eyes and mucous membranes. In case of contact, wash immediately with plenty of water.

3V Sigma USA, Inc. - 888 Woodstock St. Georgetown, SC 29440 - Tel. 866.599.7896 - www.3VSigmaUSA.com

The information contained in this data sheet is based on our present and best knowledge. However, we make no warranty, whether expressed or implied, including warranties of merchantability or of fitness for a particular use or purpose. Consequently, the product must be tested by the user according to his needs and his production and application conditions and purposes. Neither do we assume any responsibility for infringement of third parties patent rights which may arise from the use of the product. For industrial use only.